


Better Solar Metering Solution

DTSU666-G

Three Phase New Energy Meter
250A/50mA



- ◎ Bi-directional Measurement for kW and kWh
- ◎ Multi Parameter measurement
- ◎ Modbus-RTU communication
- ◎ Din Rail Mounted
- ◎ Active power refresh rate $\leq 50\text{ms}$



CHNT

CHINT METER

DTSU666-G

Three Phase New Energy
Meter 250A/50mA



Current: 250A/50mA
Aperture: $\varnothing 24\text{mm}$

SPECIFICATIONS

Measurement

- Compliance with EN 61326-1 EN 61010-1 standard
- Connection type: 3P4W(Three Phase four wire)
- Access Method: Via CT

Accuracy

- Voltage: $\pm 0.5\%$
- Current/Power: $\pm 0.5\%$
- Electric energy: $\pm 1\%$

Voltage

- Nominal Voltage(Un): $3 \times 220/380\text{V} \dots 3 \times 240/415\text{V}$
- Operating Voltage: $207\text{V} \sim 253\text{V}$
- Limited Voltage: $184\text{V} \sim 264\text{V}$

Current

- Current: 250A/50mA

Frequency

- 50Hz or 60Hz

Display Interface

- LCD
- With backlight

LED Indication

- Pulse Output

Communications

- Protocols: ModBus-RTU
- Interface: RS485
- Baud rate: 1200 / 2400 / 4800 / 9600bps(default)
19200/115200 bps(customizable)

Measured Values

- Import/Export kWh, kvarh
- Instantaneous kW, kvar, kVA
- Irms, Vrms, Frequency, Power factor, etc


Environmental

- Operating Temperature: $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- Storage Temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- Relative Humidity: $\leq 95\%$ (non-condensing)
- Atmospheric Pressure: $63.0\text{kPa} \sim 106.0\text{kPa}$


Dimension

- $72\text{mm} \times 100\text{mm} \times 65.5\text{mm}$
- Mounting Type: DIN35mm

WIRING DIAGRAM

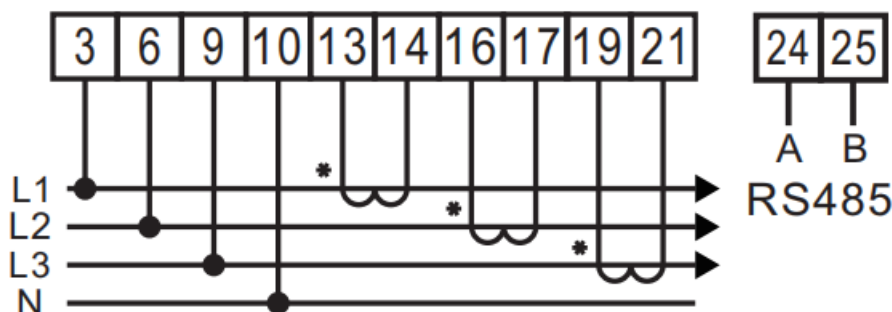

METER DIMENSIONS

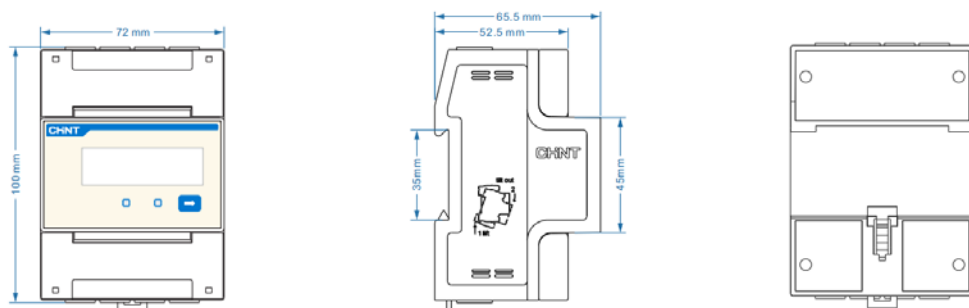

Units: mm

Zhejiang Chint Instrument & Meter Co., Ltd

Add: No.560, Yueming Road, Binjiang District, Hangzhou, Zhejiang, China P.C: 310052 Tel: +86-571-56977777

Fax: +86-577-62919588 E-mail: chintmeter@chint.com

Website: <http://en.chintim.com/>

*All rights reserved. Specification and technical data are subject to change without notice. Please contact us to confirm relevant information on ordering.

